



Sevens Installation Guide


Step 1: Install new headlamps using original bucket and trim rings

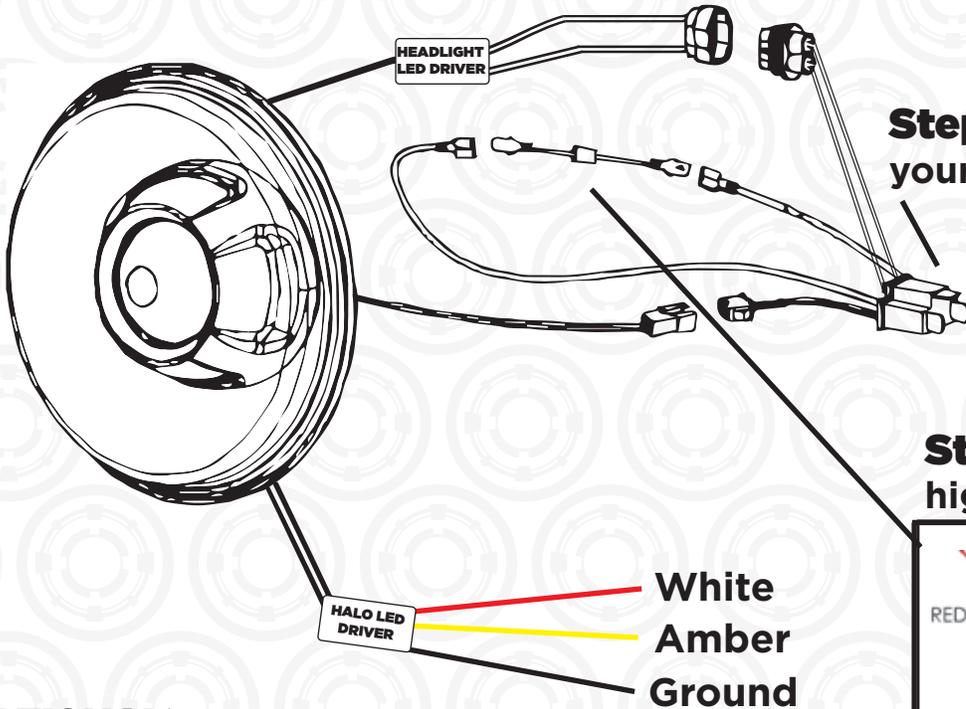

Step 2: Plug new H4 adapter into your original headlamp socket

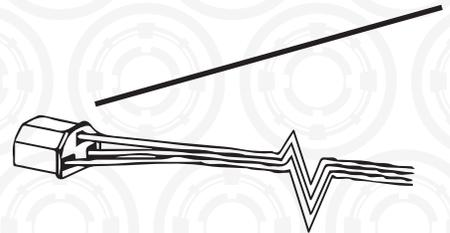

Step 3: Check low beam and high beam functionality

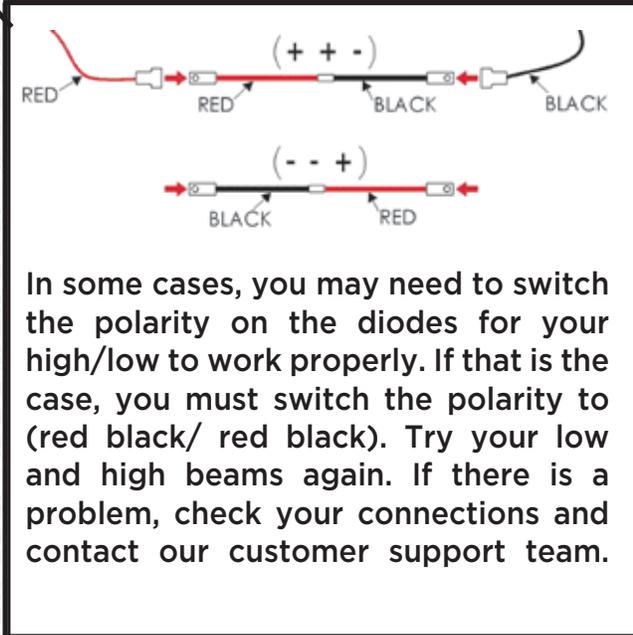

In some cases, you may need to switch the polarity on the diodes for your high/low to work properly. If that is the case, you must switch the polarity to (red black/ red black). Try your low and high beams again. If there is a problem, check your connections and contact our customer support team.

(OPTIONAL)

Step 4: Halos: There are many different options for wiring up halos.

Halo Color	Wire Color	Functionality
White	Red +	Day-Time Running
Amber	Yellow +	Turn Signal
-----	Black -	Ground

Modern Halos: You will NOT have a yellow wire.

HDR Halos: You may have additional wires that are used for dim/bright functionalities. A wiring guide is labeled on the Halo LED Driver.

Pro-Tip: Wire your White Halos (**Red Wire**) to your ignition to have your halos come on as soon as you turn your key!